

CE

EN 1634-1  
EN 15269-11  
EN 16034-1



# Fire Curtain System MFB E-120



[www.tecnitexfire.com](http://www.tecnitexfire.com)



FIRE CURTAIN SYSTEM

# MFB E-120

**TECNITEX MFB E-120** is a fire curtain with a sectorised function which guarantees its integrity against direct flames or a temperature of over 1000°C for 120 minutes.

## PROTECTIVE PURPOSE

- ♦ Temperature of non-exposed side under 140°C (Isolation).
- ♦ 180 minute fire resistance at over 1000°C (Integrity).
- ♦ Large dimensions of up to 22000 x 17000mm (Width/Height).

## CHARACTERISTICS

The system is made up of technical textile reference **TECTEX 710- PU/IN/2**, made from class E fibreglass reinforced with steel Inconel, covered with a flame retardant polyurethane compound on both sides.

Irrigation system through open nozzles, activation by electrovalve, or closed sprinklers, activation by thermal fuse.




## Exploded view


- 1** | Housing, depending on model, made from galvanised-sheet metal.
- 2** | Removable supports for forming the box and holding the roller (depending on model). Front and lower openings made with rounded edges without sharp edges or corners.
- 3** | Roller with ogive for rolling the textile.
- 4** | SMK motor depending on model with "TGFS" (Total Gravity Controlled Fail Safe Solution).
- 5** | Lateral guides with fabric holding system on the whole vertical side.
- 6** | Textile holding system on the whole vertical side of the curtain for proper isolation of fire and smoke.
- 7** | Technical fibreglass textile with different finishes depending on model and classification of the system.
- 8** | Counterweight in various finishes and sizes for proper adaptation to the box or suspended ceilings.

# Box options

## Series R

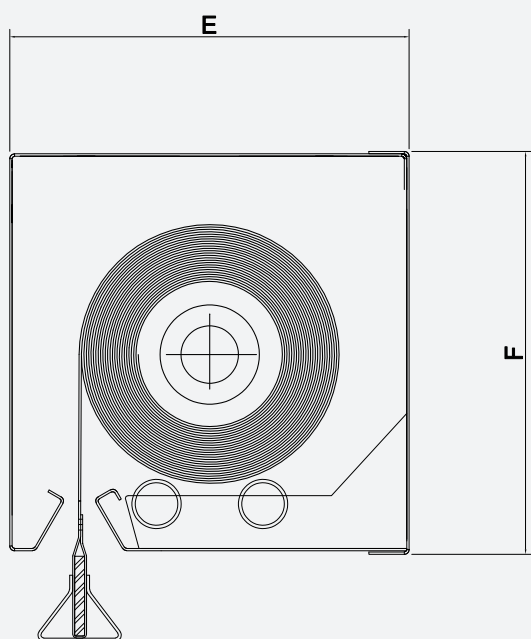

## Series S

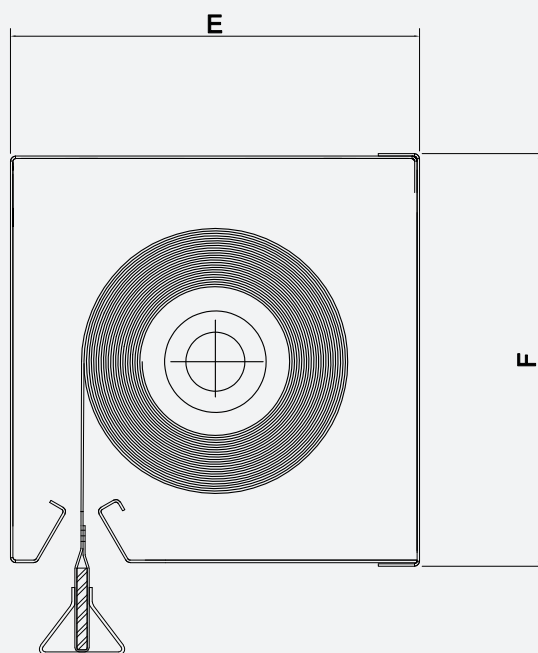


BOX	MAXIMUM DIMENSIONS (A) mm		BOX DIMENSIONS (E/F) mm
SERIE-S22	Up to 5500 wide (depending on height)		220x220
SERIE-S22	Up to 8000 high for max. width of 3500		220x220
BOX	MAXIMUM DIMENSIONS		BOX DIMENSIONS (E/F) mm
	WIDTH (A) mm	HEIGHT (B) mm	
SERIE-R22	12000	6500	220x220
SERIE-R24	12000	8000	240x260

# Closure options


## ◆ INVERTED COVER




## ◆ WIDE FLANGE TRIM

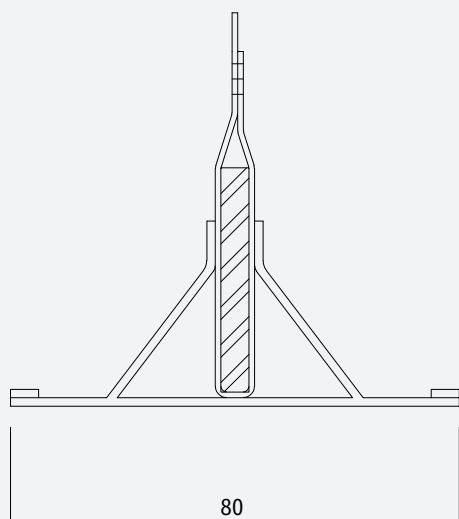

## ◆ STANDARD TRIM

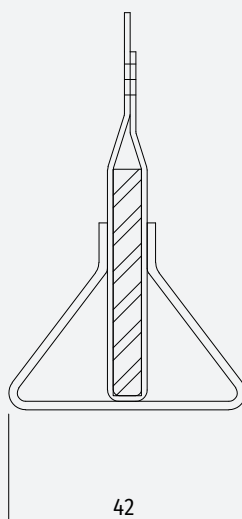

## ◆ FLAT TRIM

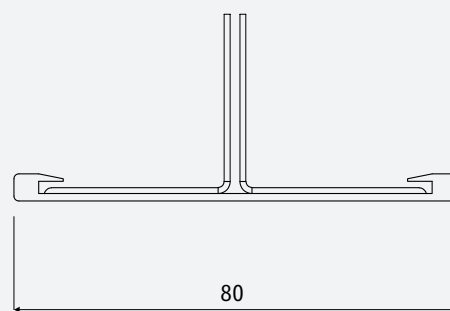


GUIDES	MAXIMUM DIMENSIONS		GUIDE DIMENSIONS (H/G) mm
	WIDTH (A) mm	HEIGHT (B) mm	
SG-120	12000	Up to 4500	70x120
SG-130	12000	> 4500	70x130



# Types of fixing

## Guides


### ◆ FRONT

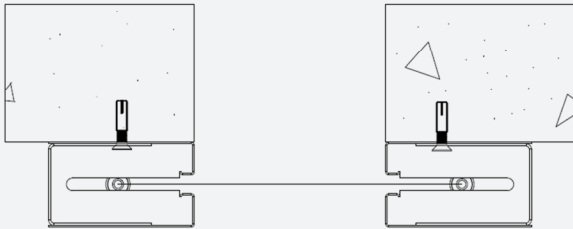


### ◆ EMBEDDED



### ◆ INSIDE

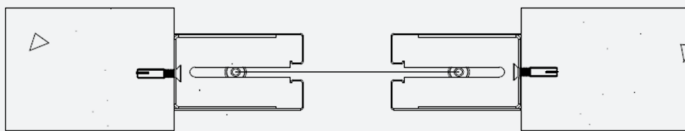


### ◆ MIXED

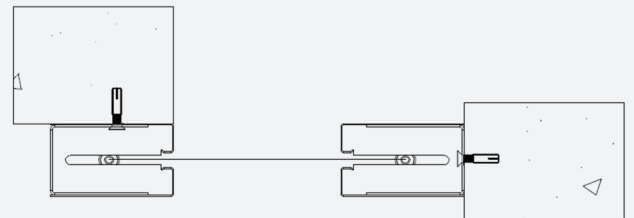

## Box

### ◆ FRONT

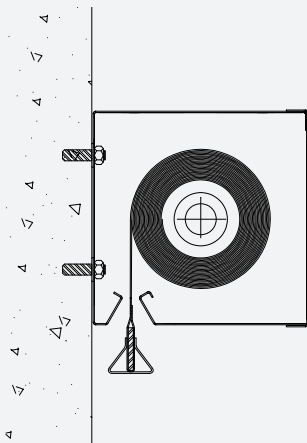

### ◆ WROUGHT

